



gbtia OUTP User pattern (200 Mbit/s) DC current = 0 mA

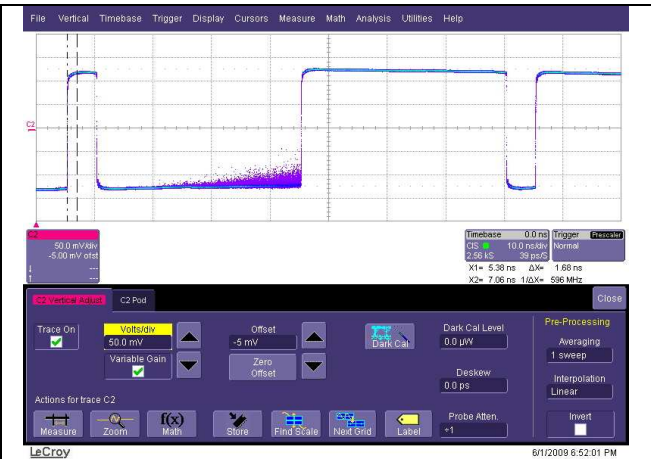

gbtia OUTP with User pattern (200 Mbit/s) DC current = 0.92 mA

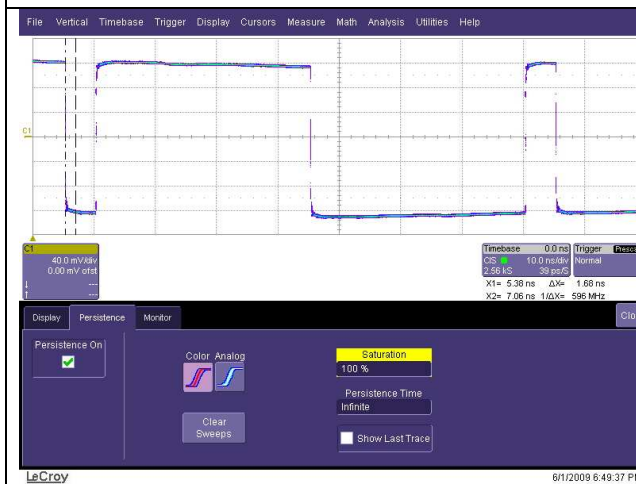

gbtia OUTN with User pattern (200 Mbit/s) DC current = 0 mA



gbtia OUTN with User pattern (200 Mbit/s) DC current = 0.92 mA